

SPECIAL ELASTOMERS TYTON® PUSH-ON TRANSITION GASKETS



The TYTON® Push-On Transition Gasket is designed to be used in Tyton® joint fittings for adapting to PVC or steel pipe (IPS dimensions). TYTON® Push-On Transition gaskets are dual hardness gaskets made from vulcanized synthetic rubber and meet the requirements of the National Sanitation Foundation (NSF) Standard ANSI/NSF-61. For applications with temperatures above 150°F, or for other special service applications, consult the table below or call your S&B Technical Products Customer Service Representative.

Tyton® Push-On Transition Gasket

Available in the following compounds:

<u>COMPOUNDS:</u>	<u>MAX SERVICE TEMPERATURE:</u>		<u>COMMON USES:</u>
	Water & Sewer	Air	
EPDM	212°F	150°F	Vegetable Oil, Alcohols, Dilute Acids, Diluted Alkalis, MEK, Acetone, fresh water, sea water, storm water, sanitary sewage & reclaimed water
Nitrile	150°F	125°F	Fresh water, salt water, sanitary sewage, storm water, petroleum products, oils, fats, chemicals, greases
Neoprene	200°F	150°F	Fresh water, salt water, sanitary sewage, storm water, greases
FKM	212°F	300°F	Fresh water, salt water, storm water, aromatic hydrocarbons, fuels, acids, vegetable oils, petroleum products, and most chemicals and solvents


• Available in Sizes 4" - 8"

• Standard SBR made per ANSI/AWWA C111/A-21.11.

S&B Technical Products

1300 East Berry Street • Fort Worth, TX 76119 • 817-923-3344 • Fax 817-924-1589
email Info@sbtechprod.com | website www.sbtechprod.com

DIMENSIONS FOR TYTON® PUSH-ON TRANSITION GASKETS

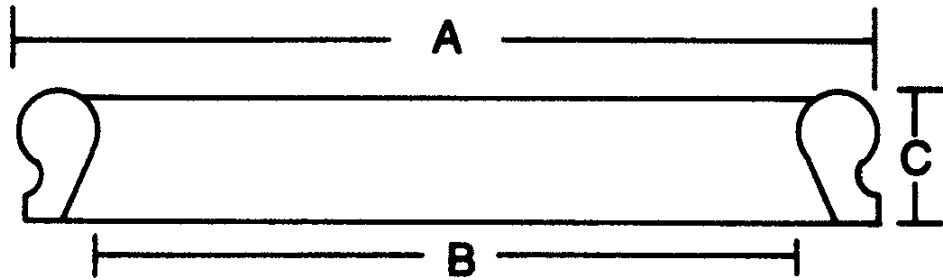

Size	A	B	C
4"	5.74	4.26	1.51
6"	7.86	6.38	1.62
8"	10.15	8.31	1.94

Call a S&B Technical Products Customer Service Representative with the project specifications for recommendation on best compound to use for a special application, current lead times and for pricing. S&B maintains inventory on many of the sizes and special compounds.

S&B Technical Products

1300 East Berry Street • Fort Worth, TX 76119 • 817-923-3344 • Fax 817-924-1589
email Info@sbtechprod.com website www.sbtechprod.com